

## Slim Downlight LED Edge-lit Recessed Round



## Compact Design, Enormous Effect!



High CRI

Dimmable

### Features

- ▶ 4" 9W (650lm), 6" 12W (800lm)
- ▶ Energy Star, cETLus, Listed
- ▶ Dimmable
- ▶ Type IC rated, Air-tight
- ▶ L70@25,000h life
- ▶ Durable airtight aluminum body with etched white finish
- ▶ Polycarbonate diffused lens for glare-free application
- ▶ Suitable for damp locations
- ▶ Easy & quick installation
- ▶ Pot Light Housing is NOT Required even for Insulated Ceilings
- ▶ No flicker, mercury free
- ▶ 5-year warranty

### Application

- ▶ Hospitals
- ▶ Retail
- ▶ Schools
- ▶ Hospitality
- ▶ Commercial



### Installation

- ▶ Insulated/drop ceilings
- ▶ Soffits
- ▶ Fits under studs and in narrow plenums

### Additional Info

- ▶ White finish

*Ultra Thin*

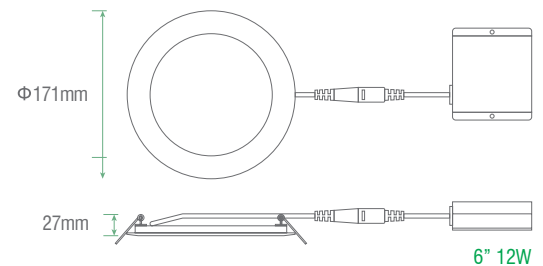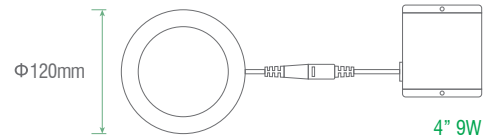

### Accessories

- ▶ Round mounting plate for 4" and 6"

### Replaces

- ▶ 9W/12W replaces 60W Halogen

PRODUCT CODE	DESCRIPTION	WATTS	LUMENS	CCT(K)	VOLT	LIFE HOURS	DIM.	M.O.L. (MM)	CUT-OUT SIZE (MM)	CASE QTY.	ES/DLC LISTING
RSD009CX0130K	4" Ultra-thin Downlight Round 9w, 3000k, 2nd Gen., DIM	9W	650	3000K	120V	25,000	Y	120 x 27	104	18	
RSD009CX0140K	4" Ultra-thin Downlight Round 9w, 4000k, 2nd Gen., DIM	9W	650	4000K	120V	25,000	Y	120 x 27	104	18	
RSD009CX0150K	4" Ultra-thin Downlight Round 9w, 5000k, 2nd Gen., DIM	9W	650	5000K	120V	25,000	Y	120 x 27	104	18	
RSD012CX0130K	6" Ultra-thin Downlight Round 12w, 3000k, 2nd Gen., DIM	12W	800	3000K	120V	25,000	Y	171 x 27	154	18	
RSD012CX0140K	6" Ultra-thin Downlight Round 12w, 4000k, 2nd Gen., DIM	12W	800	4000K	120V	25,000	Y	171 x 27	154	18	
RSD012CX0150K	6" Ultra-thin Downlight Round 12w, 5000k, 2nd Gen., DIM	12W	800	5000K	120V	25,000	Y	171 x 27	154	18	
<b>OPTIONAL ACCESSORIES</b>											
URP4: 4-1/4"	Round mounting plate for 4" Slim Downlight										
URP6: 6-1/4"	Round mounting plate for 6" Slim Downlight										
<b>Beam Angle:</b> 110°	<b>Body Material:</b> Aluminum	<b>Working Temp.:</b> -20°C~+40°C				<b>Location Type:</b> Indoor, Dry or Damp					
<b>Color Rendering Index (CRI):</b> >80	<b>Power Factor (PF):</b> 0.9	<b>Ingress Protection (IP):</b> 20				<b>Wire length:</b> 0.35m					